

UniRail Screed Rails

The versatile Metalscreed Unirail 40/60 screed rail is suitable for use with a wide variety of sand/cement or polymer screeds. For additional depth, simply rotate through 90° to increase rail height, and with the addition of adjustable feet, this rail becomes the Unirail 70/90 screed rail, which can be used for an even wider range of heights and uses. Ideally suited for use on all types of steel profile decking, also this rail can be installed to falls.

The UniRail 140 is a cost efficient system for thicker internal and external slabs where armoured edge protection is not required. This

rail can be used singly for long strip applications, or installed back to back to form a movement joint. The addition of a 20mm compressible foam sheet removes the need for expensive flexible joint filler and promotes fast track installation as both sides can be poured simultaneously. Both of these rails can be fitted with a plastic top extender strip, once fitted you have an excellent base for running a striker tube or screeding apparatus from, and the strip can be removed later if required to provide an anchor channel for floor finishes or simply to fill with flexible joint filler.

- Convenient and easy, fast track installation formwork system for screeds and slabs.
- The range covers all screeds and slabs, from 40mm up to 175mm deep.
- Provides a full strength, perpendicular face to the edge of the slab
- Permits full screed/slab depth to edge – no voids or cavities to fill.
- Galvanised high tensile strength steel construction – weather resistant, suitable for external use.
- Apertures for tie bars and dowels.
- Clip fixings on the Unirail 140 at 300mm ctrs to accept Metadowel sleeves.
- Quick fit detachable feet for stability and fixing.
- Light yet strong - easy to install.
- Can get right up close to vertical walls or columns.
- Manufactured to + or – 1mm in 3 metres, suitable for superflat floor tolerances.


Rail	Screed or Slab Depths	Weight per meter (kg)
40/60	40mm - 100mm	1.01kg
70/90	70mm - 130mm	1.13kg
140	140mm - 175mm	2.35kg

UniRail 40/60

UniRail 70/90

UniRail 140

UniRail 140 with Foam Insert

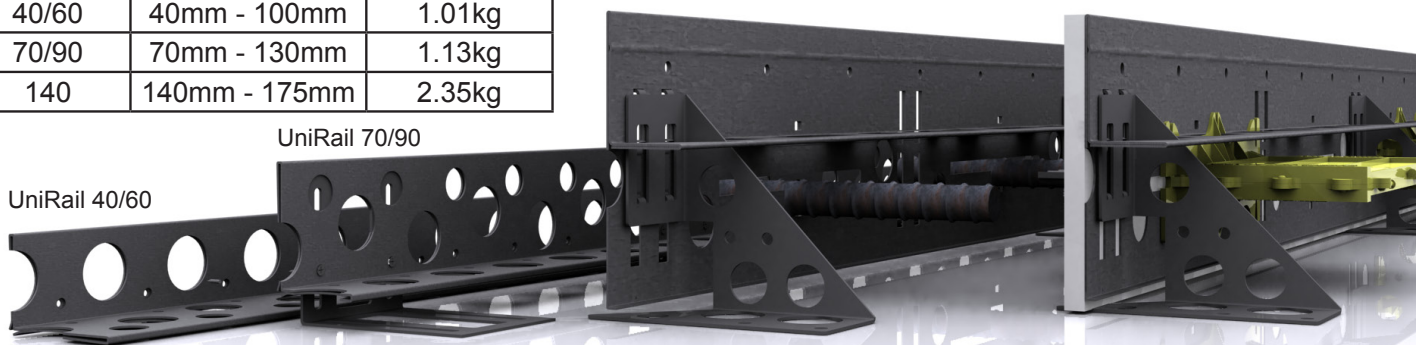

Euro Accessories Ltd

Tel: 0845 052 4050 Fax: 0845 052 6575 Email: sales@euroacc.co.uk

Web: www.euroacc.co.uk